

Micro Flapper



Features & Benefits



Sealed, Pressure Compensating Online Emitter

Sealed and compact emitter offers ease of installation




Unique Self Cleaning Mechanism

Unique self cleaning design, flow path expands in case of blockages. This reduces the risk of clogging and minimizes maintenance cost drastically




Precision Pressure Compensation

Precision moulded liquid silicone rubber diaphragm ensures pressure compensation, uniform water application and long lasting high quality performance



Industries Most Compact PC Emitter

Emitter remain flushed to the lateral. Does not falls down while recoiling.



Extended Barbed Outlet

Barbed extended outlet suitable for extension tube of 3.2 mm ID (1/8" ID)



Wide Pressure Compensating Range

Pressure regulation range 0.6-4 kg/cm² pressure (8.53 to 56.88 psi)



Color Coded

Color coded emitter facilitates easy identification of flow rate



Excellent Cvm, Manufacturer's Coefficient of Variation

Manufacturing coefficient of variation, Cvm ≤ 5% ensures high field emission uniformity

Micro Flapper

Additional Features

- **No Environmental and Chemical Effects** : UV stabilized does not have any environmental effects. Resistant to chemicals used in agriculture.
- **Assured Quality** : Conforming to Indian Standard IS 13487 and International Standard ISO 9260.

Applications

- For orchards and vineyards, greenhouses, nurseries, landscape etc.
- For areas with harsh topographical conditions.
- For irrigation of pot-plants with extension tube.
- Recommended to use where longer length of lateral is required.

Operating Specifications

- Maintain the operating pressure within the pressure regulating range.
- Filtration recommendation 130 micron or less. Actual quality of filtration can be decided by quality of source water.
- Please refer to our "Maintenance Manual" for more details.


Specifications

Discharge		Color	Emitter exponent (x)	Flow coeff. (k)	Coeff. of mfg. variation, CVm	Pressure Regulation Range, kg/cm ²
lph	gph					
2.0	0.53	Brown	0.05	2.0	3.0	0.6 - 4.0
3.0	0.79	Gray	0.05	3.0	4.0	0.6 - 4.0
4.0	1.06	Black	0.05	4.0	2.5	0.6 - 4.0
8.0	2.11	Green	0.05	8.0	3.5	0.6 - 4.0

Flow equation $q = kH^x$, q = Discharge, lph, H = Pressure head, kg/cm², k = Flow coefficient, x = Emitter exponent.

- Recommended punch size - 3.9 mm

Performance Graph

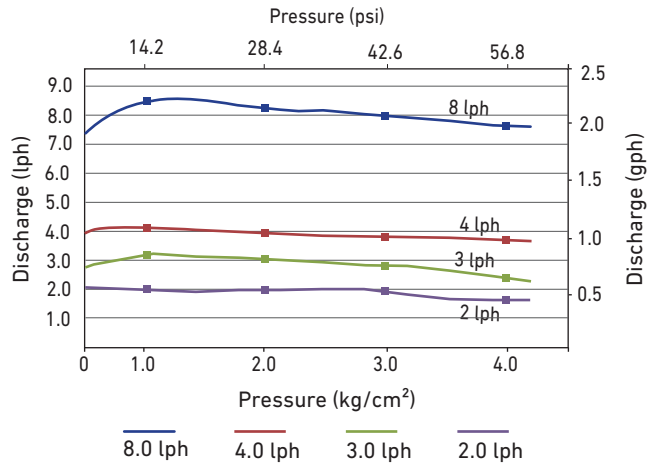

Note: Tested under standard test conditions.

Ordering Specifications

MF	X
	Discharge (lph)
	2
	3
	4
	8

Example: MF4 - This code represents Micro Flapper emitter of flow 4 lph (1 gph) .



Micro Flapper



12 mm tube (10.2 mm ID tube)

Dripper Spacing		20 cm	40 cm	50 cm	60 cm	75 cm	90 cm	100 cm	120 cm	150 cm	180 cm	200 cm	250 cm	300 cm
Slope, %		Length (m)												
		2 lph												
2	1.0	33.6	51.6	60.5	67.8	78.0	87.3	92.0	100.8	111.0	120.6	126.0	137.5	147.0
	1.5	45.8	71.6	84.5	96.0	111.8	126.0	133.0	148.8	168.0	183.6	196.0	217.5	237.0
	2.0	53.8	84.8	100.5	114.0	133.5	151.2	161.0	178.8	204.0	225.0	240.0	270.0	297.0
	2.5	60.2	95.2	113.0	128.4	150.8	170.1	182.0	202.8	231.0	257.4	274.0	310.0	342.0
	3.0	65.4	103.6	123.0	139.8	164.3	186.3	199.0	223.2	255.0	282.6	302.0	315.0	348.0
	3.5	69.8	110.8	132.0	150.0	177.0	200.7	214.0	240.0	274.5	306.0	328.0	340.0	378.0
	4.0	74.0	117.6	139.5	159.0	187.5	212.4	227.0	255.6	292.5	325.8	348.0	362.5	405.0
0	1.0	35.8	57.6	68.5	78.6	93.0	106.2	114.0	128.4	148.5	167.4	180.0	207.5	234.0
	1.5	47.6	76.4	91.0	104.4	123.8	141.3	151.0	170.4	198.0	221.4	238.0	275.0	312.0
	2.0	55.4	88.8	106.0	121.2	144.0	164.7	176.0	199.2	229.5	259.2	278.0	322.5	363.0
	2.5	61.6	98.8	118.0	135.0	159.8	182.7	196.0	220.8	255.0	288.0	310.0	357.5	402.0
	3.0	66.6	106.8	127.5	145.8	173.3	198.0	212.0	240.0	277.5	311.4	336.0	350.0	393.0
	3.5	71.0	114.0	136.5	156.0	184.5	211.5	226.0	255.6	295.5	333.0	358.0	372.5	420.0
	4.0	75.0	120.4	144.0	164.4	195.0	223.2	239.0	270.0	312.0	351.0	378.0	395.0	444.0
-2	1.0	38.2	63.2	77.0	89.4	108.8	126.9	137.0	158.4	187.5	217.8	238.0	285.0	330.0
	1.5	49.4	80.8	97.5	112.8	135.8	156.6	169.0	193.2	228.0	261.0	284.0	335.0	387.0
	2.0	57.0	92.8	112.0	129.0	154.5	178.2	192.0	219.6	256.5	293.4	318.0	375.0	429.0
	2.5	63.0	102.4	123.0	141.6	169.5	195.3	210.0	238.8	279.0	318.6	344.0	405.0	462.0
	3.0	68.0	110.4	132.5	152.4	182.3	209.7	225.0	256.8	300.0	340.2	368.0	385.0	441.0
	3.5	72.4	117.2	141.0	162.0	192.8	222.3	238.0	271.2	316.5	360.0	388.0	407.5	462.0
	4.0	76.2	123.6	148.0	170.4	203.3	233.1	250.0	285.6	331.5	376.2	408.0	427.5	486.0
		3 lph												
2	1.0	26.2	40.8	48.0	54.0	62.3	70.2	74.0	81.6	91.5	100.8	106.0	115.0	126.0
	1.5	35.4	56.0	66.0	75.0	87.8	99.0	105.0	117.6	133.5	147.6	158.0	177.5	195.0
	2.0	41.6	66.0	78.0	88.8	104.3	117.9	126.0	141.6	160.5	178.2	190.0	217.5	240.0
	2.5	46.4	73.6	87.5	99.6	117.0	133.2	142.0	159.6	181.5	203.4	216.0	247.5	273.0
	3.0	50.4	80.0	95.0	108.6	127.5	144.9	155.0	174.0	199.5	223.2	238.0	247.5	276.0
	3.5	53.8	85.6	102.0	116.4	137.3	155.7	166.0	187.2	214.5	239.4	256.0	267.5	297.0
	4.0	57.0	90.8	108.0	123.0	145.5	165.6	176.0	198.0	228.0	253.8	272.0	285.0	318.0
0	1.0	27.6	44.0	52.5	60.0	71.3	81.9	87.0	98.4	114.0	127.8	138.0	160.0	180.0
	1.5	36.6	58.4	70.0	79.8	94.5	108.0	116.0	130.8	151.5	171.0	184.0	212.5	237.0
	2.0	42.6	68.0	81.5	93.0	110.3	126.0	135.0	152.4	177.0	198.0	214.0	247.5	276.0
	2.5	47.2	75.6	90.5	103.2	123.0	140.4	150.0	169.2	196.5	221.4	238.0	275.0	309.0
	3.0	51.2	82.0	98.0	112.2	132.8	152.1	163.0	183.6	213.0	239.4	258.0	267.5	303.0
	3.5	54.6	87.6	104.5	119.4	141.8	162.0	174.0	196.8	226.5	255.6	274.0	287.5	321.0
	4.0	57.6	92.4	110.5	126.6	150.0	171.0	183.0	207.6	240.0	270.0	290.0	302.5	342.0

Minimum pressure at end of lateral is 0.6 kg/cm²

Maximum Running Length for Micro Flapper™



12 mm tube (10.2 mm ID tube)

Dripper Spacing		20 cm	40 cm	50 cm	60 cm	75 cm	90 cm	100 cm	120 cm	150 cm	180 cm	200 cm	250 cm	300 cm
Slope, %		Length (m)												
-2	1.0	28.8	47.6	57.5	66.6	80.3	93.6	101.0	116.4	136.5	158.4	172.0	205.0	237.0
	1.5	37.6	61.2	73.5	85.2	102.0	117.9	126.0	144.0	169.5	192.6	210.0	247.5	282.0
	2.0	43.4	70.4	85.0	97.8	116.3	134.1	144.0	164.4	192.0	217.8	236.0	277.5	315.0
	2.5	48.0	78.0	93.5	107.4	128.3	147.6	158.0	180.0	210.0	239.4	258.0	302.5	345.0
	3.0	52.0	84.0	101.0	115.8	138.0	158.4	170.0	194.4	225.0	255.6	276.0	290.0	330.0
	3.5	55.4	89.6	107.5	123.0	147.0	168.3	181.0	205.2	238.5	271.8	292.0	307.5	348.0
	4.0	58.4	94.4	113.0	129.6	154.5	177.3	190.0	216.0	252.0	284.4	308.0	322.5	366.0
4 lph														
2	1.0	21.8	34.0	40.5	45.6	53.3	59.4	63.0	69.6	79.5	86.4	92.0	102.5	111.0
	1.5	29.6	46.8	55.5	63.0	73.5	83.7	89.0	99.6	112.5	126.0	134.0	150.0	168.0
	2.0	34.6	54.8	65.0	74.4	87.0	99.0	106.0	118.8	135.0	151.2	162.0	182.5	204.0
	2.5	38.6	61.2	73.0	82.8	97.5	111.6	119.0	133.2	153.0	171.0	182.0	207.5	231.0
	3.0	41.8	66.8	79.5	90.6	106.5	121.5	129.0	145.2	166.5	187.2	200.0	207.5	231.0
	3.5	44.8	71.2	85.0	96.6	114.0	129.6	139.0	156.0	180.0	199.8	214.0	222.5	249.0
	4.0	47.4	75.6	90.0	102.6	120.8	137.7	147.0	165.6	190.5	212.4	228.0	237.5	267.0
0	1.0	22.8	36.4	43.5	49.8	59.3	67.5	72.0	81.6	94.5	106.2	114.0	132.5	147.0
	1.5	30.2	48.4	58.0	66.0	78.8	90.0	96.0	108.0	126.0	140.4	152.0	175.0	198.0
	2.0	35.2	56.4	67.5	77.4	91.5	104.4	112.0	126.0	145.5	163.8	176.0	205.0	231.0
	2.5	39.2	62.8	75.0	85.8	102.0	116.1	124.0	140.4	162.0	181.8	196.0	227.5	255.0
	3.0	42.4	68.0	81.5	93.0	110.3	126.0	135.0	152.4	175.5	198.0	214.0	222.5	249.0
	3.5	45.2	72.4	86.5	99.0	117.8	134.1	144.0	163.2	187.5	210.6	228.0	237.5	267.0
	4.0	47.8	76.8	91.5	105.0	124.5	142.2	152.0	171.6	198.0	223.2	240.0	250.0	282.0
-2	1.0	23.8	38.8	47.0	54.6	65.3	75.6	82.0	93.6	111.0	126.0	138.0	162.5	189.0
	1.5	31.0	50.4	60.5	69.6	83.3	96.3	103.0	117.6	138.0	156.6	170.0	200.0	228.0
	2.0	35.8	58.0	70.0	80.4	96.0	109.8	118.0	134.4	157.5	178.2	192.0	225.0	255.0
	2.5	39.8	64.4	77.0	88.2	105.8	121.5	130.0	147.6	172.5	194.4	210.0	245.0	279.0
	3.0	43.0	69.2	83.0	95.4	114.0	130.5	140.0	159.6	184.5	208.8	226.0	237.5	270.0
	3.5	45.8	74.0	88.5	101.4	120.8	138.6	149.0	169.2	196.5	221.4	240.0	250.0	285.0
	4.0	48.2	78.0	93.5	106.8	127.5	145.8	157.0	177.6	207.0	234.0	252.0	265.0	300.0
8 lph														
2	1.0	14.0	22.0	26.5	30.0	35.3	39.6	42.0	46.8	52.5	59.4	62.0	70.0	78.0
	1.5	19.0	30.0	35.5	40.8	48.0	54.0	58.0	64.8	75.0	82.8	88.0	100.0	111.0
	2.0	22.2	35.2	42.0	48.0	56.3	63.9	68.0	76.8	88.5	99.0	106.0	120.0	135.0
	2.5	24.6	39.2	47.0	53.4	63.0	72.0	77.0	86.4	99.0	111.6	118.0	135.0	153.0
	3.0	26.8	42.8	51.0	58.2	68.3	78.3	83.0	93.6	108.0	120.6	130.0	135.0	150.0
	3.5	28.6	45.6	54.5	61.8	73.5	83.7	89.0	100.8	115.5	129.6	140.0	145.0	162.0
	4.0	30.2	48.4	57.5	65.4	77.3	88.2	95.0	106.8	123.0	136.8	148.0	152.5	171.0
0	1.0	14.4	23.2	27.5	31.8	37.5	42.3	46.0	51.6	60.0	66.6	72.0	82.5	93.0
	1.5	19.2	30.8	36.5	42.0	49.5	56.7	61.0	68.4	79.5	90.0	96.0	110.0	123.0
	2.0	22.4	36.0	43.0	49.2	57.8	66.6	71.0	80.4	93.0	104.4	112.0	130.0	144.0
	2.5	24.8	40.0	47.5	54.6	64.5	73.8	79.0	88.8	103.5	115.2	124.0	145.0	162.0
	3.0	27.0	43.2	51.5	58.8	69.8	80.1	86.0	97.2	111.0	126.0	136.0	140.0	159.0
	3.5	28.8	46.0	55.0	63.0	75.0	85.5	91.0	103.2	118.5	135.0	144.0	150.0	168.0
	4.0	30.4	48.8	58.0	66.6	78.8	90.0	96.0	109.2	126.0	142.2	152.0	160.0	180.0
-2	1.0	14.8	24.0	29.0	33.6	39.8	45.9	50.0	56.4	66.0	75.6	82.0	95.0	108.0
	1.5	19.6	31.6	38.0	43.2	51.8	59.4	64.0	72.0	84.0	95.4	104.0	120.0	138.0
	2.0	22.6	36.4	44.0	50.4	60.0	68.4	74.0	84.0	97.5	109.8	118.0	137.5	156.0
	2.5	25.2	40.4	48.5	55.8	66.0	75.6	81.0	92.4	106.5	120.6	130.0	152.5	171.0
	3.0	27.2	43.6	52.5	60.0	71.3	81.9	88.0	99.6	115.5	129.6	140.0	147.5	165.0
	3.5	29.0	46.8	56.0	64.2	75.8	87.3	93.0	105.6	123.0	138.6	150.0	155.0	177.0
	4.0	30.6	49.2	59.0	67.2	80.3	91.8	98.0	111.6	129.0	145.8	158.0	165.0	186.0

Minimum pressure at end of lateral is 0.6 kg/cm²

Maximum Running Length for Micro Flapper™



16 mm tube (13.8 mm ID tube)

Dripper Spacing		20 cm	40 cm	50 cm	60 cm	75 cm	90 cm	100 cm	120 cm	150 cm	180 cm	200 cm	250 cm	300 cm
Slope, %		Length (m)												
		2 lph												
2	1.0	54.0	80.8	92.5	102.6	115.5	126.0	131.0	140.4	151.5	160.2	164.0	172.5	177.0
	1.5	74.8	115.6	135.0	151.8	174.8	194.4	205.0	225.6	249.0	270.0	284.0	307.5	327.0
	2.0	88.6	138.0	162.5	183.0	213.0	238.5	253.0	279.6	313.5	343.8	362.0	400.0	432.0
	2.5	99.4	155.6	183.5	207.6	242.3	272.7	289.0	321.6	363.0	399.6	422.0	472.5	513.0
	3.0	108.2	170.0	201.0	228.0	266.3	300.6	319.0	356.4	403.5	444.6	472.0	490.0	537.0
	3.5	115.8	182.8	216.0	245.4	287.3	324.9	345.0	385.2	438.0	484.2	516.0	535.0	588.0
	4.0	122.6	193.6	229.5	260.4	306.0	345.6	368.0	411.6	468.0	518.4	552.0	575.0	633.0
0	1.0	60.2	96.8	115.5	132.0	156.8	179.1	192.0	217.2	250.5	282.6	304.0	350.0	393.0
	1.5	79.8	128.0	153.0	175.2	207.8	237.6	254.0	286.8	331.5	372.6	402.0	465.0	522.0
	2.0	93.0	149.2	178.0	204.0	241.5	276.3	296.0	334.8	387.0	435.6	468.0	540.0	609.0
	2.5	103.2	165.6	198.0	226.2	268.5	306.9	328.0	372.0	429.0	482.4	520.0	600.0	675.0
	3.0	111.8	179.2	214.5	245.4	291.0	332.1	356.0	402.0	465.0	523.8	564.0	587.5	663.0
	3.5	119.2	191.2	228.5	261.6	310.5	354.6	380.0	429.6	496.5	558.0	600.0	627.5	708.0
	4.0	126.0	202.0	241.5	276.0	327.8	374.4	401.0	453.6	523.5	590.4	634.0	662.5	747.0
-2	1.0	66.6	113.2	139.0	162.6	199.5	234.9	256.0	298.8	358.5	419.4	460.0	560.0	657.0
	1.5	84.8	140.8	171.5	199.2	241.5	280.8	304.0	351.6	417.0	482.4	526.0	630.0	732.0
	2.0	97.2	160.4	194.0	224.4	270.8	314.1	339.0	390.0	460.5	529.2	578.0	687.5	792.0
	2.5	107.2	175.6	212.5	245.4	294.8	341.1	368.0	422.4	496.5	568.8	620.0	732.5	843.0
	3.0	115.4	188.8	227.5	262.8	315.8	364.5	393.0	450.0	528.0	603.0	656.0	690.0	789.0
	3.5	122.6	200.0	241.5	277.8	333.8	385.2	414.0	474.0	555.0	633.6	688.0	722.5	828.0
	4.0	129.2	210.4	253.5	291.6	349.5	403.2	434.0	495.6	580.5	660.6	718.0	752.5	861.0
		3 lph												
2	1.0	42.6	64.8	75.0	84.0	95.3	105.3	111.0	120.0	132.0	140.4	146.0	155.0	162.0
	1.5	58.4	90.8	107.0	120.6	139.5	156.6	166.0	183.6	205.5	225.0	236.0	262.5	282.0
	2.0	68.8	108.0	127.5	144.6	168.8	189.9	202.0	224.4	253.5	279.0	296.0	330.0	360.0
	2.5	77.0	121.2	143.5	162.6	190.5	215.1	229.0	255.6	289.5	320.4	342.0	385.0	423.0
	3.0	83.8	132.4	157.0	178.2	209.3	236.7	252.0	280.8	321.0	354.6	378.0	392.5	435.0
	3.5	89.6	142.0	168.0	191.4	225.0	254.7	271.0	303.6	346.5	385.2	410.0	427.5	471.0
	4.0	94.8	150.4	178.5	202.8	238.5	270.9	288.0	322.8	369.0	410.4	438.0	455.0	507.0
0	1.0	46.2	74.4	88.5	101.4	120.0	137.7	147.0	166.8	192.0	216.0	232.0	267.5	303.0
	1.5	61.2	98.4	117.5	134.4	159.0	181.8	195.0	220.8	255.0	286.2	308.0	355.0	402.0
	2.0	71.4	114.4	137.0	156.6	185.3	212.4	227.0	256.8	297.0	333.0	360.0	415.0	468.0
	2.5	79.2	127.2	152.0	174.0	206.3	235.8	252.0	285.6	330.0	370.8	398.0	460.0	519.0
	3.0	85.8	137.6	164.5	188.4	223.5	255.6	273.0	308.4	357.0	401.4	432.0	452.5	507.0
	3.5	91.6	146.8	175.5	201.0	238.5	271.8	291.0	330.0	381.0	428.4	462.0	482.5	543.0
	4.0	96.8	155.2	185.5	212.4	251.3	287.1	308.0	348.0	402.0	453.6	488.0	510.0	573.0
-2	1.0	50.0	84.0	102.5	119.4	145.5	171.0	185.0	214.8	256.5	297.0	326.0	395.0	459.0
	1.5	64.2	106.0	128.5	148.2	179.3	207.9	225.0	258.0	306.0	351.0	382.0	455.0	525.0
	2.0	74.0	121.2	146.0	168.6	202.5	234.9	253.0	290.4	340.5	390.6	424.0	502.5	576.0
	2.5	81.6	133.2	160.5	184.8	222.0	255.6	276.0	315.6	369.0	421.2	458.0	540.0	618.0
	3.0	88.0	143.2	172.5	198.6	237.8	274.5	295.0	337.2	394.5	448.2	486.0	512.5	585.0
	3.5	93.6	152.0	183.0	210.6	252.0	289.8	312.0	356.4	415.5	473.4	512.0	537.5	615.0
	4.0	98.6	160.0	192.5	221.4	264.8	304.2	327.0	373.2	435.0	495.0	536.0	562.5	639.0

Minimum pressure at end of lateral is 0.6 kg/cm²

Maximum Running Length for Micro Flapper™



16 mm tube (13.8 mm ID tube)

Dripper Spacing		20 cm	40 cm	50 cm	60 cm	75 cm	90 cm	100 cm	120 cm	150 cm	180 cm	200 cm	250 cm	300 cm
Slope, %		Length (m)												
		4 lph												
2	1.0	35.8	54.8	64.0	72.0	82.5	91.8	96.0	105.6	117.0	126.0	132.0	142.5	150.0
	1.5	48.8	76.4	90.0	102.0	118.5	133.2	141.0	157.2	177.0	194.4	206.0	230.0	249.0
	2.0	57.4	90.4	107.0	121.2	141.8	160.2	171.0	190.8	216.0	239.4	254.0	285.0	315.0
	2.5	64.2	101.2	120.0	136.2	160.5	180.9	193.0	216.0	246.0	273.6	290.0	330.0	363.0
	3.0	69.8	110.4	131.0	148.8	175.5	198.9	212.0	237.6	270.0	300.6	322.0	335.0	369.0
	3.5	74.6	118.4	140.5	159.6	188.3	213.3	228.0	255.6	292.5	325.8	348.0	360.0	402.0
	4.0	78.8	125.2	149.0	169.8	199.5	226.8	242.0	271.2	310.5	345.6	370.0	385.0	429.0
0	1.0	38.4	61.6	73.5	84.0	99.8	113.4	122.0	138.0	159.0	178.2	192.0	222.5	249.0
	1.5	50.8	81.6	97.5	111.6	132.0	151.2	162.0	182.4	211.5	237.6	256.0	295.0	333.0
	2.0	59.2	94.8	113.5	129.6	153.8	175.5	188.0	212.4	246.0	277.2	298.0	345.0	387.0
	2.5	65.8	105.6	126.0	144.0	171.0	195.3	209.0	236.4	273.0	307.8	330.0	382.5	429.0
	3.0	71.2	114.4	136.5	156.0	185.3	211.5	226.0	255.6	295.5	333.0	358.0	375.0	420.0
	3.5	76.0	122.0	145.5	166.8	197.3	225.9	242.0	273.6	316.5	354.6	382.0	400.0	450.0
	4.0	80.2	128.8	154.0	175.8	208.5	238.5	255.0	288.0	333.0	374.4	404.0	422.5	474.0
-2	1.0	41.0	68.0	83.0	96.6	117.0	136.8	148.0	171.6	204.0	235.8	258.0	310.0	360.0
	1.5	52.8	86.8	105.0	121.2	145.5	168.3	182.0	208.8	246.0	280.8	306.0	362.5	417.0
	2.0	61.0	99.6	120.0	138.0	165.8	191.7	206.0	235.2	276.0	315.0	342.0	402.5	462.0
	2.5	67.4	109.6	132.0	151.8	181.5	209.7	225.0	256.8	300.0	342.0	372.0	435.0	498.0
	3.0	72.6	118.0	142.0	163.2	195.0	225.0	241.0	274.8	321.0	365.4	396.0	415.0	474.0
	3.5	77.4	125.6	150.5	173.4	207.0	237.6	256.0	291.6	340.5	385.2	418.0	437.5	498.0
	4.0	81.6	132.0	158.5	182.4	217.5	250.2	269.0	306.0	357.0	405.0	438.0	457.5	522.0
		8 lph												
2	1.0	23.4	36.4	43.0	48.6	56.3	63.0	67.0	74.4	82.5	91.8	96.0	107.5	117.0
	1.5	31.6	49.6	59.0	66.6	78.8	89.1	94.0	105.6	120.0	133.2	142.0	160.0	177.0
	2.0	37.0	58.4	69.5	79.2	93.0	105.3	112.0	126.0	144.0	160.2	172.0	195.0	216.0
	2.5	41.2	65.6	78.0	88.8	104.3	118.8	126.0	141.6	162.0	181.8	194.0	220.0	246.0
	3.0	44.8	71.2	84.5	96.6	114.0	129.6	138.0	154.8	178.5	198.0	212.0	220.0	246.0
	3.5	47.8	76.0	90.5	103.2	121.5	138.6	148.0	166.8	190.5	214.2	228.0	237.5	267.0
	4.0	50.6	80.4	96.0	109.2	129.0	146.7	157.0	176.4	202.5	226.8	244.0	252.5	282.0
0	1.0	24.4	39.2	46.5	53.4	63.0	72.0	77.0	87.6	100.5	113.4	122.0	140.0	159.0
	1.5	32.4	52.0	62.0	70.8	84.0	96.3	103.0	116.4	133.5	151.2	162.0	187.5	210.0
	2.0	37.6	60.4	72.0	82.2	97.5	111.6	120.0	135.6	156.0	176.4	190.0	217.5	246.0
	2.5	41.8	67.2	80.0	91.8	108.8	124.2	133.0	150.0	174.0	196.2	210.0	242.5	273.0
	3.0	45.4	72.8	87.0	99.6	117.8	134.1	144.0	163.2	187.5	212.4	228.0	237.5	267.0
	3.5	48.4	77.6	92.5	106.2	126.0	144.0	154.0	174.0	201.0	226.8	244.0	255.0	285.0
	4.0	51.0	82.0	98.0	112.2	132.8	151.2	162.0	183.6	211.5	239.4	256.0	267.5	303.0
-2	1.0	25.4	41.6	50.5	58.2	70.5	81.9	88.0	100.8	118.5	136.8	148.0	177.5	204.0
	1.5	33.2	54.0	65.0	75.0	89.3	103.5	111.0	127.2	148.5	169.2	182.0	215.0	246.0
	2.0	38.4	62.4	75.0	85.8	102.8	117.9	127.0	144.0	168.0	190.8	208.0	242.5	276.0
	2.5	42.4	68.8	82.5	94.8	113.3	129.6	139.0	158.4	184.5	208.8	226.0	265.0	300.0
	3.0	46.0	74.4	89.0	102.0	121.5	139.5	150.0	170.4	198.0	225.0	242.0	255.0	288.0
	3.5	49.0	79.2	94.5	108.6	129.8	148.5	159.0	181.2	210.0	237.6	258.0	270.0	306.0
	4.0	51.6	83.2	100.0	114.6	136.5	156.6	168.0	190.8	222.0	250.2	270.0	282.5	321.0

Minimum pressure at end of lateral is 0.6 kg/cm²

Maximum Running Length for Micro Flapper™



20 mm tube (17.6 mm ID tube)

Dripper Spacing		20 cm	40 cm	50 cm	60 cm	75 cm	90 cm	100 cm	120 cm	150 cm	180 cm	200 cm	250 cm	300 cm
Slope, %		Length (m)												
		2 lph												
2	1.0	77.0	110.4	124.5	135.0	147.8	157.5	162.0	169.2	177.0	181.8	184.0	187.5	192.0
	1.5	109.8	165.6	191.0	212.4	240.8	263.7	276.0	297.6	322.5	342.0	354.0	375.0	390.0
	2.0	131.0	200.8	234.5	262.2	300.8	333.9	351.0	384.0	423.0	455.4	476.0	515.0	543.0
	2.5	147.6	228.0	267.5	300.6	347.3	387.0	409.0	450.0	501.0	543.6	572.0	625.0	669.0
	3.0	161.2	250.8	294.5	331.8	385.5	431.1	456.0	504.0	564.0	617.4	650.0	670.0	726.0
	3.5	173.0	270.0	318.0	359.4	417.8	468.9	497.0	550.8	619.5	678.6	718.0	742.5	807.0
	4.0	183.4	287.2	339.0	383.4	447.0	502.2	533.0	591.6	667.5	734.4	778.0	805.0	879.0
0	1.0	91.4	146.8	175.5	200.4	237.8	271.8	291.0	328.8	379.5	428.4	460.0	532.5	600.0
	1.5	121.0	194.4	232.0	265.2	315.0	360.0	385.0	435.6	504.0	567.0	610.0	705.0	792.0
	2.0	141.0	226.0	270.0	309.0	366.8	418.5	448.0	507.6	586.5	660.6	710.0	820.0	924.0
	2.5	156.4	251.2	300.0	343.2	407.3	465.3	498.0	562.8	651.0	732.6	788.0	910.0	1026.0
	3.0	169.4	272.0	325.0	372.0	441.0	504.0	540.0	610.8	705.0	793.8	854.0	892.5	1005.0
	3.5	180.8	290.0	346.5	396.6	470.3	537.3	576.0	651.6	753.0	847.8	912.0	952.5	1071.0
	4.0	190.8	306.4	366.0	418.8	496.5	567.9	608.0	687.6	795.0	894.6	962.0	1005.0	1131.0
-2	1.0	106.2	184.4	229.0	270.6	335.3	398.7	436.0	512.4	622.5	732.6	810.0	992.5	1173.0
	1.5	132.4	223.6	274.0	320.4	391.5	459.9	500.0	582.0	697.5	811.8	892.0	1080.0	1263.0
	2.0	150.8	251.6	306.5	357.0	433.5	505.8	549.0	634.8	756.0	874.8	958.0	1150.0	1338.0
	2.5	165.4	274.4	333.0	386.4	468.0	544.5	589.0	679.2	805.5	928.8	1016.0	1212.5	1407.0
	3.0	177.8	293.6	355.5	412.2	497.3	577.8	624.0	718.8	849.0	975.6	1066.0	1122.5	1296.0
	3.5	188.6	310.4	375.5	434.4	523.5	606.6	655.0	752.4	888.0	1018.8	1110.0	1170.0	1347.0
	4.0	198.4	325.6	393.5	454.8	547.5	633.6	683.0	783.6	924.0	1058.4	1152.0	1212.5	1395.0
		3 lph												
2	1.0	61.6	90.8	104.0	114.0	127.5	137.7	143.0	152.4	162.0	169.2	172.0	180.0	183.0
	1.5	86.2	132.0	154.0	172.2	197.3	218.7	230.0	250.8	276.0	297.0	310.0	335.0	354.0
	2.0	102.4	158.8	186.5	209.4	242.3	270.9	286.0	315.6	352.5	383.4	404.0	442.5	474.0
	2.5	115.0	179.2	211.0	238.2	277.5	311.4	330.0	364.8	409.5	450.0	474.0	527.5	570.0
	3.0	125.2	196.4	231.5	262.2	306.0	343.8	365.0	405.6	457.5	504.0	534.0	552.5	603.0
	3.5	134.2	211.2	249.5	282.6	330.0	372.6	396.0	440.4	499.5	550.8	584.0	605.0	663.0
	4.0	142.2	224.0	265.0	300.6	351.8	396.9	423.0	471.6	535.5	592.2	628.0	652.5	717.0
0	1.0	70.2	112.8	134.5	154.2	182.3	208.8	223.0	252.0	292.5	327.6	354.0	407.5	459.0
	1.5	93.0	149.2	178.0	204.0	241.5	276.3	296.0	334.8	387.0	435.6	468.0	540.0	609.0
	2.0	108.2	173.6	207.5	237.6	281.3	321.3	344.0	390.0	450.0	505.8	546.0	630.0	708.0
	2.5	120.2	192.8	230.5	263.4	312.8	357.3	383.0	433.2	499.5	563.4	606.0	700.0	786.0
	3.0	130.2	208.8	249.5	285.6	339.0	387.0	414.0	469.2	541.5	610.2	656.0	685.0	771.0
	3.5	139.0	222.8	266.5	304.8	361.5	413.1	442.0	500.4	577.5	649.8	700.0	732.5	822.0
	4.0	146.6	235.2	281.0	321.6	381.8	435.6	467.0	528.0	610.5	687.6	738.0	772.5	870.0
-2	1.0	78.8	134.8	166.5	195.6	240.8	284.4	310.0	362.4	438.0	513.0	566.0	687.5	810.0
	1.5	99.8	166.4	203.0	236.4	287.3	335.7	364.0	421.2	502.5	581.4	636.0	765.0	891.0
	2.0	114.0	188.8	229.0	265.8	321.0	373.5	404.0	465.6	552.0	635.4	692.0	827.5	957.0
	2.5	125.6	206.4	250.0	289.2	348.8	404.1	436.0	501.6	592.5	678.6	740.0	880.0	1014.0
	3.0	135.2	221.6	268.0	309.0	372.0	430.2	464.0	532.8	627.0	718.2	782.0	822.5	945.0
	3.5	143.6	234.8	283.5	327.0	393.0	453.6	489.0	560.4	658.5	752.4	818.0	860.0	987.0
	4.0	151.0	246.8	297.5	342.6	411.8	475.2	511.0	585.6	687.0	783.0	850.0	895.0	1023.0

Minimum pressure at end of lateral is 0.6 kg/cm²

Maximum Running Length for Micro Flapper™



20 mm tube (17.6 mm ID tube)

Dripper Spacing		20 cm	40 cm	50 cm	60 cm	75 cm	90 cm	100 cm	120 cm	150 cm	180 cm	200 cm	250 cm	300 cm
Slope, %		Length (m)												
		4 lph												
2	1.0	52.4	78.4	90.5	100.2	112.5	123.3	129.0	138.0	148.5	156.6	162.0	170.0	177.0
	1.5	72.4	112.0	131.0	147.0	169.5	189.0	200.0	219.6	243.0	264.6	276.0	302.5	321.0
	2.0	85.8	133.6	157.5	177.6	206.3	231.3	245.0	272.4	304.5	334.8	354.0	392.5	423.0
	2.5	96.0	150.4	178.0	201.0	234.8	264.6	281.0	312.0	352.5	388.8	412.0	460.0	501.0
	3.0	104.6	164.4	194.5	220.8	258.0	291.6	310.0	345.6	391.5	432.0	460.0	475.0	522.0
	3.5	112.0	176.8	209.0	237.6	278.3	314.1	335.0	373.2	424.5	469.8	500.0	520.0	573.0
	4.0	118.6	187.2	222.0	252.0	296.3	334.8	357.0	398.4	454.5	504.0	536.0	557.5	615.0
0	1.0	58.2	93.2	111.5	127.8	151.5	172.8	185.0	208.8	241.5	271.8	292.0	337.5	381.0
	1.5	77.0	123.6	148.0	169.2	200.3	228.6	245.0	277.2	321.0	360.0	388.0	447.5	504.0
	2.0	89.8	144.0	172.0	196.8	233.3	266.4	286.0	322.8	373.5	419.4	452.0	522.5	588.0
	2.5	99.6	160.0	191.0	218.4	259.5	296.1	317.0	358.8	414.0	466.2	502.0	580.0	654.0
	3.0	108.0	173.2	207.0	237.0	280.5	321.3	344.0	388.8	448.5	505.8	544.0	567.5	639.0
	3.5	115.2	184.8	221.0	252.6	300.0	342.0	367.0	415.2	478.5	540.0	580.0	607.5	681.0
	4.0	121.6	195.2	233.0	267.0	316.5	361.8	387.0	438.0	505.5	568.8	612.0	640.0	720.0
-2	1.0	64.2	108.8	133.5	156.0	191.3	225.0	245.0	285.6	343.5	399.6	440.0	532.5	627.0
	1.5	81.8	135.6	165.0	191.4	231.8	270.0	292.0	337.2	400.5	460.8	504.0	602.5	699.0
	2.0	93.8	154.4	187.0	216.0	261.0	302.4	326.0	375.6	442.5	507.6	554.0	657.5	759.0
	2.5	103.4	169.2	204.5	236.4	284.3	328.5	354.0	405.6	478.5	547.2	594.0	705.0	810.0
	3.0	111.4	182.0	219.5	253.2	303.8	351.0	378.0	433.2	508.5	579.6	630.0	662.5	759.0
	3.5	118.4	193.2	232.5	268.2	321.0	370.8	399.0	456.0	534.0	610.2	662.0	695.0	795.0
	4.0	124.6	202.8	244.5	281.4	336.8	387.9	418.0	477.6	558.0	635.4	690.0	725.0	828.0
		8 lph												
2	1.0	34.6	53.2	62.0	69.6	80.3	89.1	94.0	103.2	114.0	122.4	128.0	140.0	147.0
	1.5	47.2	74.0	87.0	98.4	114.8	129.6	137.0	152.4	172.5	189.0	200.0	222.5	243.0
	2.0	55.6	87.6	103.5	117.6	137.3	155.7	165.0	184.8	210.0	232.2	246.0	277.5	306.0
	2.5	62.0	98.0	116.0	132.0	155.3	175.5	187.0	208.8	238.5	264.6	282.0	320.0	351.0
	3.0	67.4	106.8	127.0	144.0	169.5	192.6	205.0	229.2	262.5	291.6	312.0	322.5	360.0
	3.5	72.0	114.4	136.0	154.8	182.3	207.0	220.0	247.2	282.0	315.0	336.0	350.0	390.0
	4.0	76.2	121.2	144.0	163.8	193.5	219.6	234.0	262.8	301.5	334.8	358.0	372.5	414.0
0	1.0	37.0	59.2	71.0	81.0	96.0	109.8	118.0	133.2	153.0	172.8	186.0	215.0	243.0
	1.5	49.0	78.8	94.0	107.4	127.5	145.8	156.0	176.4	204.0	228.6	246.0	285.0	321.0
	2.0	57.2	91.6	109.5	125.4	148.5	170.1	182.0	205.2	237.0	266.4	288.0	332.5	375.0
	2.5	63.4	102.0	121.5	139.2	165.0	188.1	202.0	228.0	264.0	297.0	320.0	370.0	414.0
	3.0	68.8	110.4	132.0	150.6	178.5	204.3	219.0	247.2	286.5	322.2	346.0	362.5	408.0
	3.5	73.4	117.6	140.5	160.8	190.5	217.8	233.0	264.0	304.5	343.8	370.0	385.0	435.0
	4.0	77.4	124.4	148.5	169.8	201.8	230.4	246.0	278.4	322.5	361.8	390.0	407.5	459.0
-2	1.0	39.4	65.6	80.0	93.0	112.5	131.4	142.0	164.4	195.0	225.0	246.0	295.0	345.0
	1.5	51.0	83.6	101.0	116.4	140.3	162.0	175.0	200.4	237.0	270.0	294.0	347.5	402.0
	2.0	58.8	96.0	115.5	133.2	159.8	184.5	198.0	226.8	265.5	302.4	328.0	387.5	444.0
	2.5	65.0	105.6	127.0	146.4	174.8	201.6	217.0	247.2	289.5	329.4	358.0	420.0	480.0
	3.0	70.2	114.0	137.0	157.2	188.3	216.9	233.0	265.2	309.0	351.0	382.0	400.0	456.0
	3.5	74.6	121.2	145.5	166.8	199.5	229.5	247.0	280.8	327.0	370.8	402.0	422.5	480.0
	4.0	78.8	127.6	153.0	175.8	210.0	241.2	259.0	295.2	343.5	388.8	422.0	442.5	501.0

Minimum pressure at end of lateral is 0.6 kg/cm²