


STAKE FOR BUBBLER



Manufactured with virgin, temperature resistant plastic material.

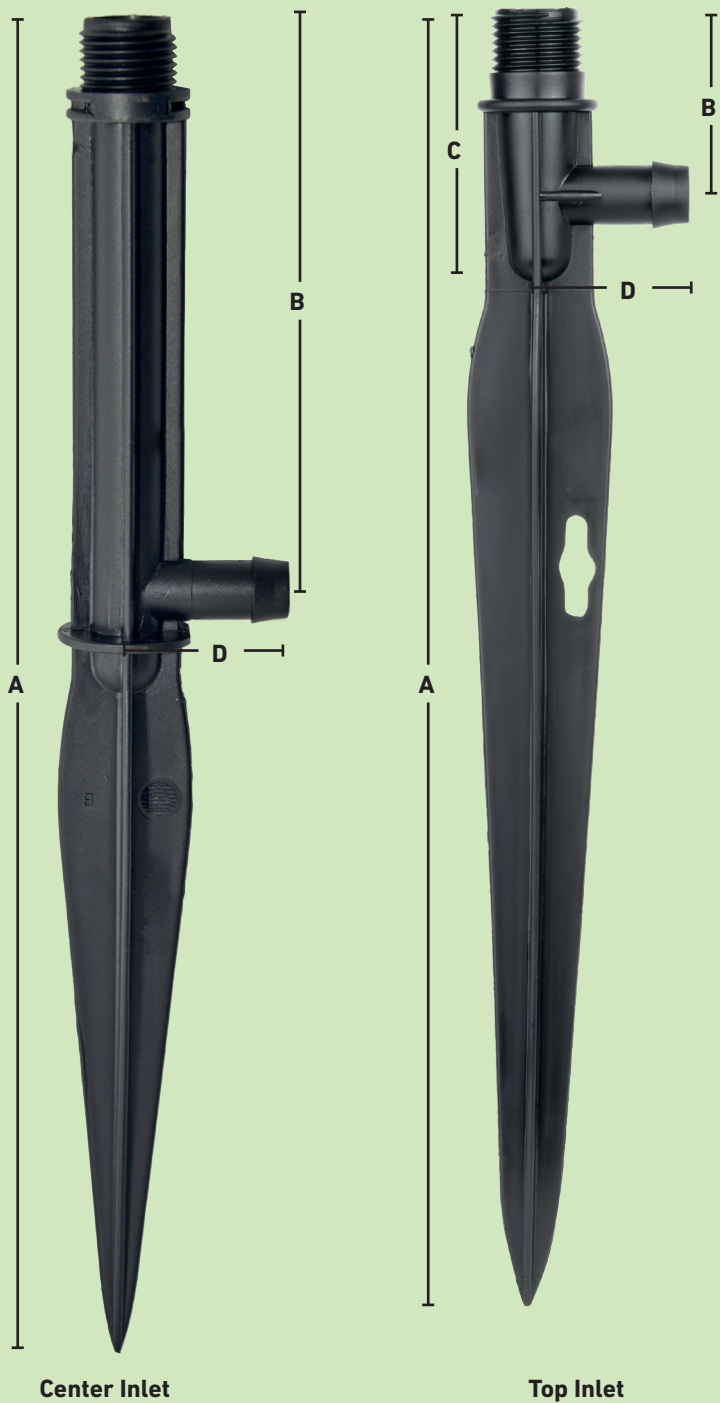

Available in two inlet position options, center inlet and top inlet.



Robust design to withstand abusive environmental conditions.



1/2" male threaded outlet. Suitable for bubbler. Can accommodate bubbler's inlet filter.

Dimensions, mm

	A	B	C	D
Center Inlet	300	122	-	32.8
Top Inlet	290	38	55	32.8

STAKE FOR BUBBLER

Additional Features

- Available in two inlet position option
 - Center Inlet** - Facilitates tubing connection flush to the ground
 - Top Inlet** - Tube can be connected to inlet located at upper side of the stake
- Inlet connection options suitable for tube dimensions of 13mm ID
- Outlet connection ½" Male threaded.
- Suitable for any bubbler having ½" Female threaded inlet.

Applications

To install bubblers for landscape and gardening applications.



Higher wall thickness offers higher resilience as compared to other stakes available in the market

Ordering Specification

Tube size, mm	Code	Box		
		Qty. (Nos.)	Weight (kg)	Packing Category
Center Inlet				
13 ID	SBC13	250	6.8	B
Top Inlet				
13 ID	SBCTI13	250	6.8	B

