


FABRICATED FITTINGS - DARK GRAY


PVC COUPLER

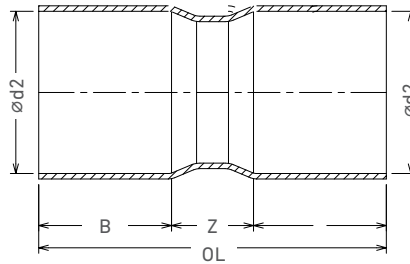

CODE	SIZE (ØD)	SOCKET LENGTH (B) MIN	Z MIN	OL MIN.	Ø D2 MIN. + 0.3
PVFLCS050PN10DG	50	62	30	154	50
PVFLCS063PN10DG	63	76	30	182	63

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

PVC RRJ REPAIR COUPLER

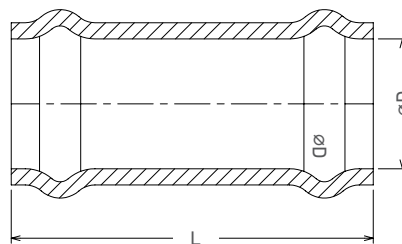


CODE	SIZE (ØD)	L MIN.
PVFRQC050PN100L300	50	300
PVFRQC063PN100L270	63	270
PVFRQC075PN100L300	75	300
PVFRQC090PN100L330	90	330
PVFRQC110PN100L370	110	370
PVFRQC125PN100L395	125	395
PVFRQC160PN100L345	160	345
PVFRQC200PN100L545	200	545

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

FABRICATED FITTINGS - DARK GRAY


PVC ADAPTOR

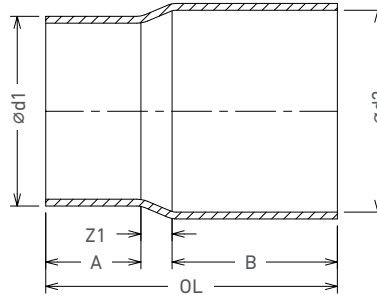

CODE	SIZE (ØD)	SOCKET LENGTH (B) MIN	A MIN	Z1 MIN	OL MIN.	Ø D1 MIN.	Ø D2 MIN. + 0.3
PVFAdaptor50PN10DG	50	62	31	10	108	50	50
PVFAdaptor63PN10DG	63	76	38	10	124	63	63

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

PVC BEND 15° DEG.

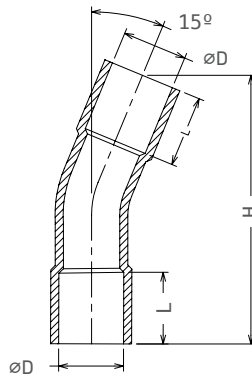


CODE	SIZE (ØD)	SOCKET LENGTH (L) MIN.	H MIN.
PVFSBS1520PN10DGCS	20	16.0	70
PVFSBS1525PN10DGCS	25	18.5	80
PVFSBS1532PN10DGCS	32	22.0	100
PVFSBS1540PN10DGCS	40	26.0	110
PVFSBS1550PN10DGCS	50	31.0	140
PVFSBS1563PN10DGCS	63	37.5	180
PVFSBS1575PN10DGCS	75	43.5	205
PVFSBS1590PN10DGCS	90	51.0	240
PVFSBS15110P10DGCS	110	61.0	295

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

FABRICATED FITTINGS - DARK GRAY


PVC BEND 22.5° DEG.

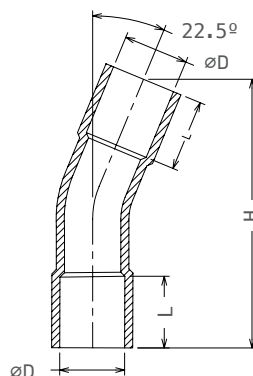

CODE	SIZE (Ø D)	SOCKET LENGTH (L) MIN.	H MIN.
PVFSBS2220PN10DGCS	20	16.0	80
PVFSBS2225PN10DGCS	25	18.5	85
PVFSBS2232PN10DGCS	32	22.0	100
PVFSBS2240PN10DGCS	40	26.0	142
PVFSBS2250PN10DGCS	50	31.0	186
PVFSBS2263PN10DGCS	63	37.5	200
PVFSBS2275PN10DGCS	75	43.5	238
PVFSBS2290PN10DGCS	90	51.0	287
PVFSBS22110P10DGCS	110	61.0	360

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

PVC BEND 30° DEG.

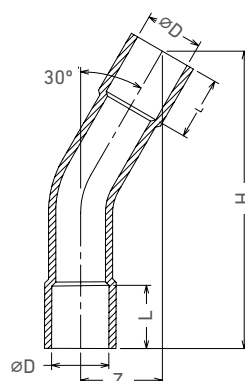


CODE	SIZE (Ø D)	SOCKET LENGTH (L) MIN.	Z MIN.	H MIN.
PVFSBS3020PN10DGCS	20	16.0	25	85
PVFSBS3025PN10DGCS	25	18.5	30	90
PVFSBS3032PN10DGCS	32	22.0	35	106
PVFSBS3040PN10DGCS	40	26.0	50	147
PVFSBS3050PN10DGCS	50	31.0	65	193
PVFSBS3063P10DGIISO	63	37.5	70	208
PVFSBS3075P10DGIISO	75	43.5	75	245
PVFSBS3090P10DGIISO	90	51.0	90	297
PVFSBS30110P10DGIISO	110	61.0	100	370

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

FABRICATED FITTINGS - DARK GRAY


PVC BEND 45° DEG.

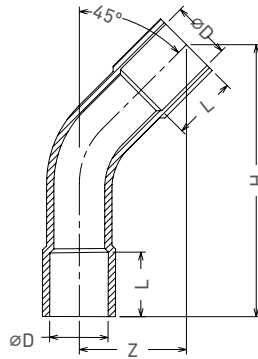

CODE	SIZE (ØD)	SOCKET LENGTH (L) MIN.	Z MIN.	H MIN.
PVFSBS4520PN10DGCS	20	16.0	40	85
PVFSBS4525PN10DGCS	25	18.5	45	90
PVFSBS4532PN10DGCS	32	22.0	52	106
PVFSBS4540PN10DGCS	40	26.0	70	147
PVFSBS4550PN10DGCS	50	31.0	80	193
PVFSBS4563P10DGIISO	63	37.5	93	208
PVFSBS4575P10DGIISO	75	43.5	100	245
PVFSBS4590P10DGIISO	90	51.0	130	297
PVFSBS45110P10DGIIO	110	61.0	160	370

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

PVC LONG BEND 90° DEG.

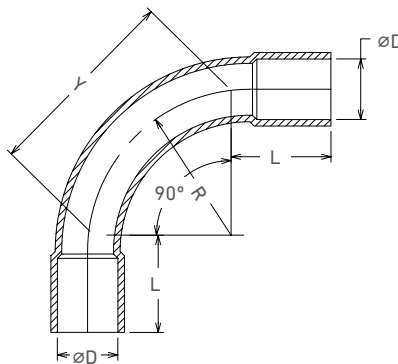


CODE	SIZE (Ø D)	SOCKET LENGTH MIN.	Y MIN.	R MIN.	L MIN.
PVFLBS9020PN10DGCS	20	16.0	95	60	20
PVFLBS9025PN10DGCS	25	18.5	118	75	25
PVFLBS9032PN10DGCS	32	22.0	151	96	32
PVFLBS9040PN10DGCS	40	26.0	189	120	40
PVFLBS9050PN10DGCS	50	31.0	236	150	50
PVFLBS9063PN10DGCS	63	37.5	297	189	63
PVFLBS9075PN10DGCS	75	43.5	354	225	75
PVFLBS9090PN10DGCS	90	51.0	424	270	90
PVFLBS90110P10DGCS	110	61.0	519	330	110

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.

FABRICATED FITTINGS - DARK GRAY

PVC SHORT BEND 90° DEG.

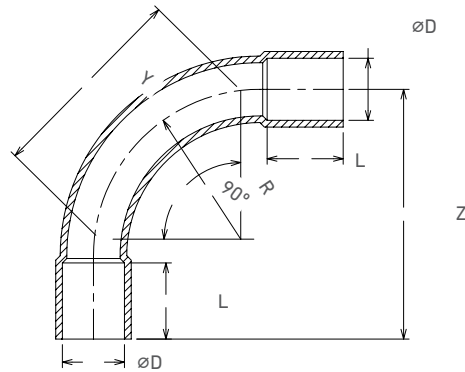

CODE	SIZE (Ø D)	SOCKET LENGTH (L) MIN.	Y MIN.	R MIN.	Z MIN.
PVFSBS020PN10DGCS	20	16.0	63	40	60
PVFSBS025PN10DGCS	25	18.5	79	50	75
PVFSBS032PN10DGCS	32	22.0	101	64	95
PVFSBS040PN10DGCS	40	26.0	126	80	120
PVFSBS050PN10DGCS	50	31.0	157	100	150
PVFSBS063PN10DGIISO	63	37.5	198	126	190
PVFSBS075PN10DGCS	75	43.5	236	150	235
PVFSBS090PN10DGCS	90	51.0	283	180	285
PVFSBS110PN10DGCS	110	61.0	346	220	350

Note: • All dimensions are in mm. • All fabricated fittings are available in different pressure classes up to PN 20 kg/cm² as per ISO : 1452. Fittings in other standard and not covered above are also made available on request.