

Quick Fix[®] Pipes

Precise Rubber Ring Joint Pipe



Features & Benefits

Convenient Push-Fit Joints

Faster installation, immediate pressure testing and commissioning possible and jointing can be done during any time of the day under any weather conditions




Smooth Inner Wall

Smooth inner wall minimizes frictional losses and scaling due to precipitation

Various Sizes Available

Available in sizes from 20 mm (1/2") to 630 mm (24") as per above standards




Close Dimensional Tolerances

Excellent Characteristics of PVC provided durable pipe with close dimensional tolerances

Available in Various Pressure Rating and Standards

Pressure - 2.5 to 12.5 kg/cm² as per IS & 6-25 kg/cm² as per ISO Standards - IS:4985, DIN:8062, ISO1452-2



Advance Manufacturing Technology

Advance manufacturing technology and our experience bring the quality products in the market

Quick Fix® Pipes

Additional Features

- Manufactured from high quality uPVC compound
- Joints accommodate expansion and contraction.
- Joints are resistant to soil movement due to earthquake effects.
- The elastomeric rings have properties matching to Pipe with long life.
- Excellent corrosion and chemical resistance to most acidic and alkaline solutions
- Light weight.
- Easy to handle and transport.

Applications

- Used as Mainline OR Sub main in drip irrigation systems
- Water distribution lines, Sewerage transmission lines, Reclaimed water distribution lines, Lift irrigation etc.

Dimension as per ISO:1452.2

Nominal Outside Dia	Minimum Wall Thickness in mm						
	Pressure Rating in kg/cm ²						
mm	PN 6	PN 8	PN 10	PN 12.5	PN 16	PN 20	PN 25
20	-	-	-	-	1.5	1.9	
25	-	-	-	1.5	1.9	2.3	
32	-	1.5	1.6	1.9	2.4	2.9	
40	1.5	1.6	1.9	2.4	3.0	3.7	
50	1.6	2.0	2.4	3.0	3.7	4.6	
63	2.0	2.5	3.0	3.8	4.7	5.8	
75	2.3	2.9	3.6	4.5	5.6	6.8	
90	2.8	3.5	4.3	5.4	6.7	8.2	
110	2.7	3.4	4.2	5.3	6.6	8.1	10.0
125	3.1	3.9	4.8	6.0	7.4	9.2	11.4
140	3.5	4.3	5.4	6.7	8.3	10.3	12.7
160	4.0	4.9	6.2	7.7	9.5	11.8	14.6
180	4.4	5.5	6.9	8.6	10.7	13.3	16.4
200	4.9	6.2	7.7	9.6	11.9	14.7	18.2
225	5.5	6.9	8.6	10.8	13.4	16.6	-
250	6.2	7.7	9.6	11.9	14.8	18.4	-
280	6.9	8.6	10.7	13.4	16.6	20.6	-
315	7.7	9.7	12.1	15.0	18.7	23.2	-
355	8.7	10.9	13.6	16.9	21.1	26.1	-
400	9.8	12.3	15.3	19.1	23.7	29.4	-
450	11.0	13.8	17.2	21.5	26.7	33.1	-
500	12.3	15.3	19.1	23.9	29.7	36.8	-
560	13.7	17.2	21.4	26.7	-	-	-
630	15.4	19.3	24.1	30.0	-	-	-


^a Design coefficient C is 2.5 for 20 mm to 90 mm nominal diameter pipes and 2.0 for 110 mm to 630 mm diameter pipes

Dimension as per IS:4985

Nominal Outside Dia	Minimum Wall Thickness in mm					
	Pressure Rating in kg/cm ²					
mm	2.5	4.0	6.0	8.0	10.0	12.5
20	-	-	-	-	1.1	1.4
25	-	-	-	1.2	1.4	1.7
32	-	-	-	1.5	1.8	2.2
40	-	-	1.4	1.8	2.2	2.8
50	-	-	1.7	2.3	2.8	3.4
63	-	1.5	2.2	2.8	3.5	4.3
75	-	1.8	2.6	3.4	4.2	5.1
90	1.3	2.1	3.1	4.0	5.0	6.1
110	1.6	2.5	3.7	4.9	6.1	7.5
125	1.8	2.9	4.3	5.6	6.9	8.5
140	2.0	3.2	4.8	6.3	7.7	9.5
160	2.3	3.7	5.4	7.2	8.8	10.9
180	2.6	4.2	6.1	8.0	9.9	12.2
200	2.9	4.6	6.8	8.9	11.0	13.6
225	3.3	5.2	7.6	10.0	12.4	15.3
250	3.6	5.7	8.5	11.2	13.8	17.0
280	4.1	6.4	9.5	12.5	15.4	19.0
315	4.6	7.2	10.7	14.0	17.3	21.4
355	5.1	8.1	12.0	15.8	19.6	24.1
400	5.8	9.1	13.5	17.8	22.0	27.2
450	6.5	10.3	15.2	20.0	24.8	30.5
500	7.2	11.4	16.9	22.3	27.5	33.9
560	8.1	12.8	18.9	24.9	30.8	38.0
630	9.1	14.4	21.3	28.0	34.7	42.7

Note: Blue colour represents wall thickness of available sizes in Quick Fix™ PVC pipes.

More Crop Per Drop®

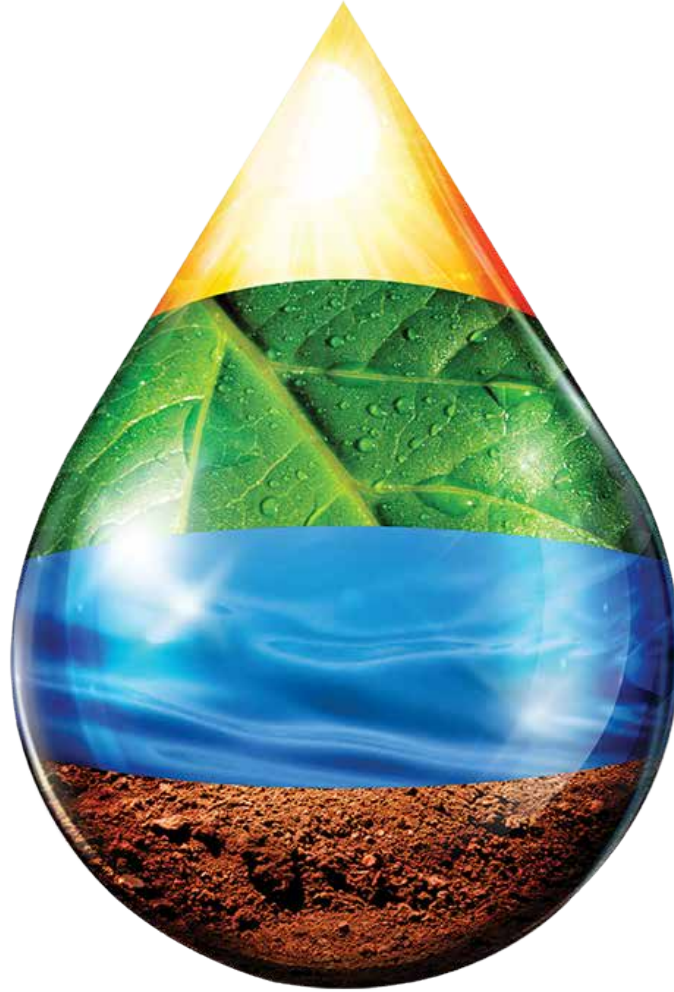

**We revere these elements of our universe.
They reflect our ethos.**

Yellow, Green, Blue and Brown are colours of Nature and have been embodied in our logo. They encapsulate the conviction of the Founder and the lasting commitment of the Corporation to agriculture. Jain Irrigation is striving to add value to the entire agri-chain. At the same time, they produce and process a complete range of agri-products for the exacting world markets and growing domestic clientele.

The Corporation is poised to grow and attain water, food and energy security.



Te; : 0257-2258011; Fax: 0257- 2258111; **Toll Free : 1800 599 5000**

Connect with us

