




TOP HAT GROMMET

Grommet is probably the smallest still most important accessory of your drip irrigation system. It is a junction between rigid PVC pipe and flexible polyethylene tube or dripline. Failure of grommet leads to tedious maintenance.

We are happy to introduce Top Hat Grommet for easy to install, reliable and leak proof and connection. Top Hat Grommet is suitable for start connector/ take off sizing 12mm, 16mm and 20mm; plain, dripline and driptape tubing.

Features

- Straight outer walls for easy installation.
- Converging inside walls pushed against the pipe hole surface to provide leak proof sealing.
- Nominal working pressure 4 kg/cm² suitable for drip irrigation applications.
- Maximum working pressure 6 kg/cm².
- Manufactured with high grade thermoplastic rubber to provide high elastic properties with strength of plastic.
- Precision injection moulding provides dimensional stability.

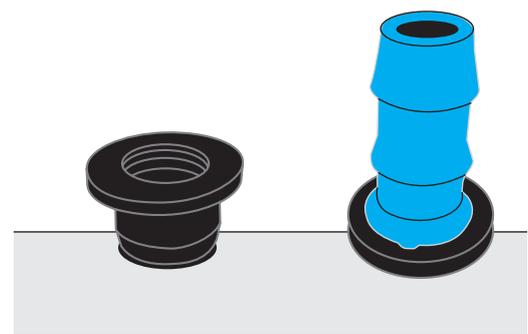

Ordering Code	Description	Drill Size, (mm)	Suitable pipe type and size and maximum wall thickness (mm)	Quantity per bag, no.
JGR13TH	Top Hat Grommet for 13mm Take Off	17.5	Rigid PVC pipe up to 110 mm and wall thickness up to 6 mm	100

Installation



Use drill size of 17.5 mm to make the drill hole on the pipe.



Deburr the hole carefully. Check that no sharp corners are present.



Insert the Top Hat Grommet fully. Ensure that the collar is resting on the pipe wall.



Insert the start connector/ Take off gently.



Ease out the fitment by slightly wobbling the start connector/ take off



Properly insert the tubing

Other Related Products

	Code	Name
1	DRIMAC	DIS/SIS Drill Machine NOS
2	DWH175	DIS/SIS 17.5 mm Tool for Drill Machine
3	MPT5	Multipurpose Tool for Takeoff Grommet
4	CT175	DIS/SIS Cutting Tool for 13 X 16 mm GTO
5	GRP13	Grommet Plug



Note: Always install the Top Hat Grommet and Start Connector/Take Off below the ground with proper earth packing. Avoid direct exposure to sunlight and other atmospheric conditions to get a long life of the grommet.



Tel: +91-257-2258011; **Fax:** +91-257-2258111; **Toll Free :** 1800 599 1000

E-mail: jisl@jains.com; **Website:** www.jains.com