

Jain Fertilizer Tank - Plastic

Quick Portable Tank




Features & Benefits




Heavy Duty, High Quality, Light Weight Tank

Manufactured from Heavy Duty, High Quality Plastic Fertilizer Tank with optimum weight



Innovative Turbulent Inlet

Turbulent inlet ensures thorough mixing of chemicals and / or fertilizers



Additional Fine Filter

To avoid entry of solid particles in system, Special provision of strainer on the outlet



Separate Draining Facility Available

Special Drain port given to flush the tank

Fertilizer Tank PL

Additional Features

- Separate valves are provided on the inlet & outlet to control the injection rate.
- High pressure hose assembly inlet / outlet connection.
- Maximum working pressure 4 kg/cm².
- Available in 30, 60 & 90 liter (8, 16 & 24 gallon) capacity.

Applications

- Fertilizer and chemical injection through drip and sprinkler irrigation systems.

Performance Chart

Inlet / Outlet Pressure Difference	Minimum operation time in minutes		
	30 Ltr	60 Ltr	90 Ltr
kg/cm ²			
0.2	12	15	25
0.3	09	10	15
0.5	07	08	10

Note:


- Tested under standard test conditions.
- Operation time is given as guidelines only and actual timing can be changed according to the density of stock solution and other field conditions.

Ordering Specifications

PFT	XXX
	Tank Capacity (Liters)
	30 - 030
	60 - 060
	90 - 090

Example: PFT060- This code represents Fertilizer Tank PL with 60 liters of tank capacity.

Dimensional Specifications

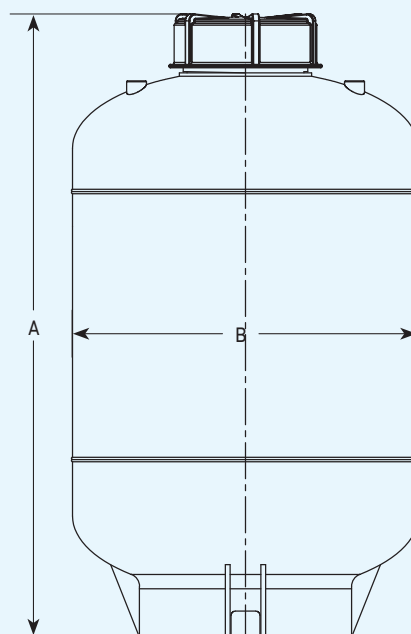

Tank Capacity	I/O Connection	A	B
Liters	inch	mm	
30	1/2" - 3/4"	475	400
60	1/2" - 3/4"	720	400
90	1/2" - 3/4"	975	400

